
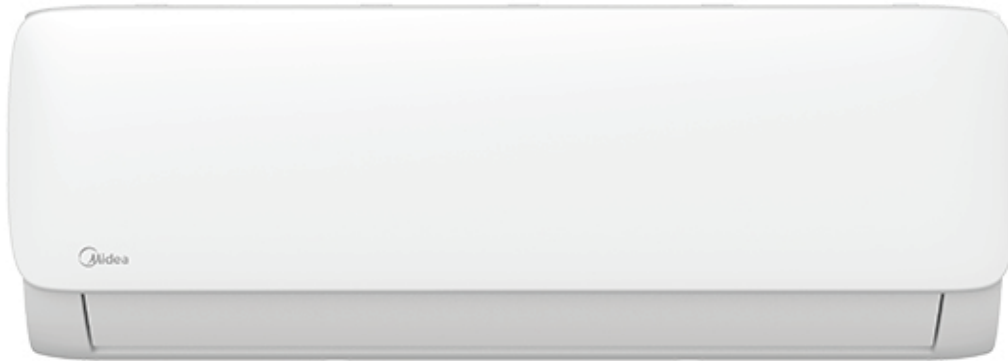


XTREME SAVE LITE

Quattro DC Inverter



The epitome of simplicity!

	ECO MODE		LOUVER MEMORY		SUPER IONIZER		EMERGENCY OPERATION
	1W STANDBY		FOLLOW ME		HIGH DENSITY FILTER		3D AIR FLOW
	HORIZONTAL SWING		DEHUMIDIFICATION FUNCTION		BACTERIAL+DUST REMOVAL		TWO-WAY DRAINING
	VERTICAL SWING		SELF CLEANING		COLD CATALYST FILTER		24H TIMER
	QUIET MODE		REFRIGERANT LEAKAGE DETECT		FROST PROTECTION		WIFI CONTROL
	NIGHT MODE		SELF DIAGNOSIS		GEAR CHANGE		MULTI-SPLIT COMPATIBILITY
	TURBO MODE		AUTO RESTART		COMFORT TECHNOLOGY		DIAMOND EDGED CASING



XTREME SAVE LITE Quattro DC Inverter



- The louvers of the indoor unit of the air conditioner move automatically in all directions.
- *Follow Me*, Sensitive Cooling for Your Surrounding.
- Ultra-low noise level.
- Possibility to set the operating power of the compressor to 50%, 75% or 100%.
- With Auto restart function.
- High Density filter and *Super Ionizer* technology ensures a clean atmosphere free of dust, odors, and microorganisms.
- Seasonal SEER to A++ and SCOP A+++ performance ratings.
- Via Wi-Fi you control your unit wherever you are.

Direct control of your air conditioner
wherever and whenever you are
via your smartphone
with the Midea Air app.



XTREME SAVE LITE		TECHNICAL SPECIFICATIONS							
MODEL		9,000 BTU		12,000 BTU		18,000 BTU		24,000 BTU	
CODE	Indoor	AG2ECO-09NXD0-I		AG2ECO-12NXD0-I		AG2ECO-18NXD0-I		AG2ECO-24NXD0-I	
	Outdoor	AG2ECO-09N8D0-O		AG2ECO-12N8D0-O		AG2ECO-18N8D0-O		AG2ECO-24N8D0-O	
FUNCTION		COOLING	HEATING	COOLING	HEATING	COOLING	HEATING	COOLING	HEATING
Capacity	W	2640	2930	3520	3810	5280	5570	7030	7330
	Btu/h	8530	10000	12000	13000	18000	18500	24000	26000
Capacity Range	W	1030 - 3220	820 - 3370	1380 - 4310	1070 - 4380	3390 - 5900	3100 - 5850	2110 - 8210	1550 - 8210
	Btu/h	3500 - 11000	2800 - 11500	4700 - 14700	3650 - 14950	6700 - 21200	4700 - 23800	7200 - 28800	5300 - 32200
Power Input (min-nom-max)	W	733	771	1096	1027	1550	1750	2402	2130
Current Input (nom)	A	3.18	3.35	4.76	4.46	6.7	7.6	10.5	9.3
SEER (Pdesign)	-	7.4	-	7.0	-	7.0	-	6.4	-
SCOP	-	-	5.3	-	5.5	-	5.1	-	5.1
Energy efficiency class	-	A++	A+++	A++	A+++	A++	A++	A++	A+++
Operation Range	°C	-15~50	-20~24	-15~50	-20~24	-15~50	-20~24	-15~50	-20~24
Power Supply	V/Ph/Hz	220-240 / 1 / 50		220-240 / 1 / 50		220-240 / 1 / 50		220-240 / 1 / 50	
Electric Fuse	A	16		16		16		16	
Air Flow Volume	m³/h	520/460/330		530/400/350		800/600/500		1090/770/610	
Application Area	m²	12 - 18		16 - 23		24 - 35		32 - 47	
Sound Pressure Level	Indoor	37/32/22/20		37/32/22/21		41/37/31/20		46/37/34.5/21	
	Outdoor	55.5		55		57		60	
Sound Power Level	Indoor	54		56		56		62	
	Outdoor	62		63		65		67	
Refrigerant	-	R32		R32		R32		R32	
Liquid - gas pipe diameter	Inch	1/4" - 3/8"		1/4" - 3/8"		1/4" - 1/2"		3/8" - 5/8"	
Maximum pipe length	m	25		25		30		30	
Maximum pipe height	m	10		10		20		20	
Unit dimensions WxHxB	Indoor	726x291x210		835x295x208		969x241x320		1083x244x336	
	Outdoor	720x495x270		720x495x270		874x554x330		955x673x342	
Weight	Indoor	8		8.7		11.2		13.6	
	Outdoor	23.5		23.7		33.5		43.9	